



# NÔRDIK SERIES TALL LINEAR

GAS 60TL



Nordik 60TL with black brick, traditional logs and rectangle surround

KOZY  HEAT  
FIREPLACES

Model 36DV with black glass panels, full  
rectangle screen front and a Komfy 70" kit



Nordik 60TL with black glass, and birch logs

# NÔRDIK TALL LINEAR SERIES

## Nordik 60TL

Nordik 60TL measurements are:  
Safety Screen: 62-3/8" x 22-1/2"  
Rectangle Surround: 64-5/8" x 25"



Birch Log with Standard Safety Screen



Traditional Log with Optional Rectangle Surround

# NÔRDIK TALL LINEAR SERIES

## Optional Refractory/Panel Options



Black Glass with Birch Logs



Ledgestone with Traditional Logs



Herringbone with Traditional Logs



Chicago Brick with Birch Logs



Black Brick with Traditional Logs

## Remote Control Option



# KOMFORT KONTROL

### Remote control features:



Thermostat function



Top Light Kit: Modulation  
Ember Bed: On/Off



Flame height modulation



IPI to continuous pilot



Fan speed modulation

## Burn Videos



Traditional Log



Birch Log

# NÔRDIK TALL LINEAR SERIES

## Specifications

Model	Nordik 60TL
Height	46-1/8"
Width	69-1/2"
Back Width	69-1/2"
Depth	19-1/2"
Weight	355 lbs
Viewing Area	60" x 20"
BTU NG High / Low	51,000 / 34,000
BTU LP High / Low	51,000 / 40,000
Steady State NG / LP	73.37% / 75.75%
AFUE % NG / LP	71.94% / 74.63%
Valve System	IPI
Fan Kit	Optional
Top Light Kit	Included
Ember Bed Light Kit	Included
Screen Front	Included
Required Media	Traditional Log or Birch Log
Horizontal Power Vent	Optional

Features, Options & Specifications are subject to change.

Each unit factory tested

Certified to ANSI Z21.88 Vented Gas Heaters

## Heat Management Options

Model	Nordik 60TL
Komfort Zone Kit*	Optional
Interior Heat Transfer Kit	Optional
Exterior Heat Transfer Kit	Optional

\*Front Plenum only. No Side Plenum

## Clearances | Without Komfort Zone Kit

Model	Nordik 60TL
Minimum height of the fireplace enclosure	80"
Base of the fireplace to ceiling	80"
Fireplace top finishing edge to ceiling	46-3/8"
Fireplace from stand off brackets	0"
From fireplace corners	2-5/8"
From fireplace front	36"
Fireplace sides to adjacent sidewall	0"
Mantel 6" deep from fireplace top finishing edge	12"
Mantel 6" deep from base of fireplace	45-5/8"

## Clearances | With Komfort Zone Kit

Model	Nordik 60TL
Mantel 6" deep from fireplace top finishing edge	0"
Mantel 6" deep from base of fireplace	33-5/8"

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.

## Vent System Approval & Requirements

- BDM™
- American Metal™ Products (Amerivent)
- Metal Fab™
- ICC™
- Simpson Dura-Vent™
- Selkirk

**Elbows:** For each additional 90° elbow used after the first elbow, 3' must be subtracted from the maximum venting allowed. For each additional 45° elbow used after the first elbow, 1½' must be subtracted from the maximum venting allowed.

Note: (2) 45° elbows = (1) 90° elbow.

### Nordik 60TL

Approved 5 x 8 venting standard

Reduces down to 4 x 6-5/8 for vertical termination only

Approved for Class A / Masonry Chimney conversion

### Horizontal Terminations

**Minimum:** 12" vertical vent pipe + 90° horizontal elbow + vent cap


**Maximum:** 25' vertical vent pipe + 90° horizontal elbow + 25' horizontal vent pipe + vent cap

### Vertical Terminations

Minimum: 3' + vent cap

Maximum: 50' + vent cap

## Nordik 60TL

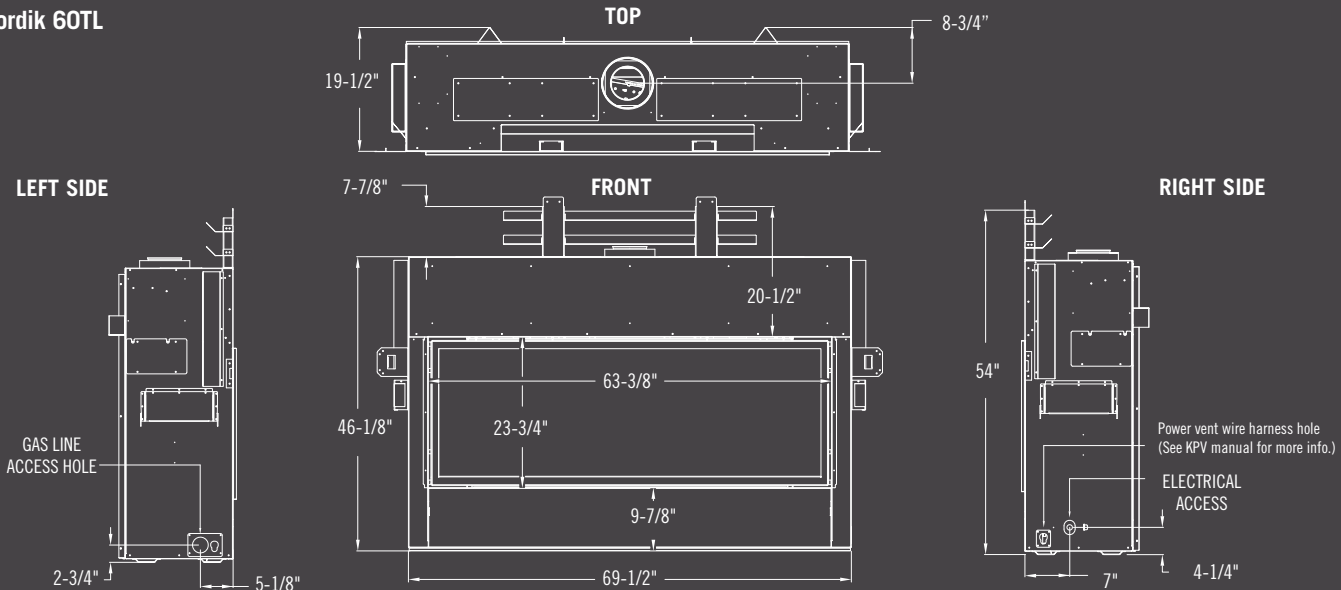

**KOZY HEAT**  
FIREPLACES

In order to continually provide the highest quality product available, features/options, specifications, & dimensions are subject to change. Flame appearance and characteristics may be affected by altitude, fuel type, venting configuration, and other factors. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Hussong Mfg. Co., Inc.  
204 Industrial Park Road, Lakefield, MN 56150  
Phone 1-800-253-4904 www.kozyheat.com 6-24



Product Line:



For complete information on the Kozy Heat product line, please contact us at:

FOR CALIFORNIA RESIDENTS ONLY

⚠ California Proposition 65 Warning

**WARNING:** This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).